


Coil Handling Equipment

PRESS ROOM STARS

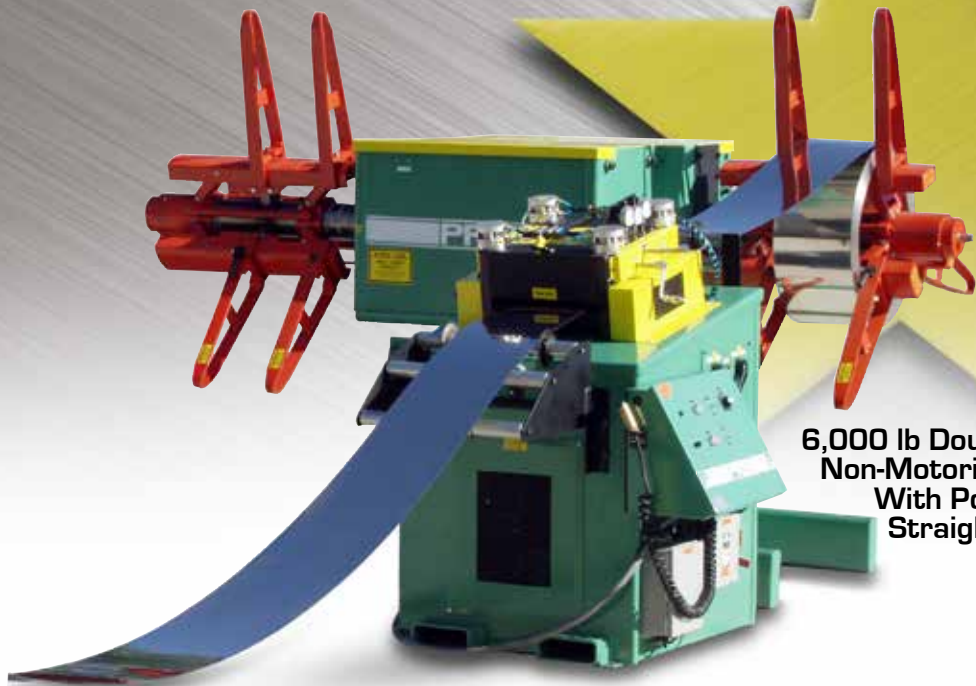

**6,000 lb Double Arbor
Non-Motorized Reel
With Powered
Straightener**

PRE pay-out reels and coil handling equipment are the perfect complement to our Air or Servo feeds. Many control options are available on motorized units including mechanical loop arms, Ultrasonic Loop controls and Laser Loop controls to protect the material surface.

Capacities range from 600 through 50,000 lbs with single arbor, double arbor, motorized and non-motorized models available. PRE press room equipment - **longtime proven performers.**

Standard features:

- Heavy duty welded steel construction
- Self-centering coil support shoes
- Coil keeper arms
- Loop-arm control
- Quick release on outer keeper arms
- Manual arbor expansion on reels up to 10,000 lb
- Hydraulic arbor expansion on reels over 15,000 lb
- Adjustable air brake on non-motorized reels
- All motorized reels include a soft start and stop variable speed drive and speed control

These may also be of interest:

Many options are available: (see next page)



Coil Upender



**600 lb
Non-Motorized**



**1,500 lb Double
Arbor Motorized**



**6,000 lb
Motorized**



**20,000 lb Single Arbor
Non-Motorized**

Proven performers

www.pressroomequipment.com
www.norwalkinnovation.com



**PRESS ROOM
EQUIPMENT CO.**



Press Room Equipment Co./Norwalk Innovation
807-A North Prince Lane
Springfield, MO 65802
Phone: 417-864-3636 • Fax: 417-864-3667

SPECIFICATIONS & DIMENSIONAL DATA

SINGLE AND DOUBLE ARBOR PAYOUT REELS

Coil Model Number	Max. I.D. Range	Max Mat'l Width	Coil O.D.	Motor	Std. Brake Type	Capacity Per Arbor	Max Arbor Speed
PR-121500-NAB	12" to 20"	12"	48"	N/A	Air	1,500 Lbs.	N/A
PR-121500-DC	12" to 20"	12"	48"	1/2 HP-120V/1 PH	N/A	1,500 Lbs.	28 RPM
PR-181500-NAB	12" to 20"	18"	48"	N/A	Air	1,500 Lbs.	N/A
PR-181500-DC	12" to 20"	18"	48"	1/2 HP-120V/1 PH	N/A	1,500 Lbs.	28 RPM
PR-122500-NAB	15" to 20"	12"	48"	N/A	Air	2,500 Lbs.	N/A
PR-122500-DC	15" to 20"	12"	48"	1 1/2 HP-220/1 PH	N/A	2,500 Lbs.	22 RPM
PR-182500-NAB	15" to 20"	18"	48"	N/A	Air	2,500 Lbs.	N/A
PR-182500-DC	15" to 20"	18"	48"	1 1/2 HP-220V/1PH	N/A	2,500 Lbs.	22 RPM
PH-242500-NAB	15" to 20"	24"	48"	N/A	Air	2,500 Lbs.	N/A
PR-242500-DC	15" to 20"	24"	48"	1 1/2 HP-220V/1PH	N/A	2,500 Lbs.	22 RPM
PR-124000-NAB	15" to 20"	12"	60"	N/A	Air	4,000 Lbs.	N/A
PR-124000-DC	15" to 20"	12"	60"	2 HP-220V/1PH	N/A	4,000 Lbs.	22 RPM
PR-184000-NAB	15" to 20"	18"	60"	N/A	Air	4,000 Lbs.	N/A
PR-184000-DC	15" to 20"	18"	60"	2HP-220V/1PH	N/A	4,000 Lbs.	22 RPM
PR-244000-NAB	15" to 20"	24"	60"	N/A	Air	4,000 Lbs.	N/A
PR-244000-DC	15" to 20"	24"	60"	2HP-220V/1PH	N/A	4,000 Lbs.	22 RPM
PR-364000-NAB	15" to 20"	36"	60"	N/A	Air	4,000 Lbs.	N/A
PR-364000-DC	15" to 20"	36"	60"	2HP-220V/1PH	N/A	4,000 Lbs.	22 RPM
PR-186000-NAB	15" to 20"	18"	60"	N/A	Air	6,000 Lbs.	N/A
PR-186000-DC	15" to 20"	18"	60"	3 HP-220V/1PH	N/A	6,000 Lbs.	12 RPM
PR-246000-NAB	15" to 20"	24"	60"	N/A	Air	6,000 Lbs.	N/A
PR-246000-DC	15" to 20"	24"	60"	3HP-220V/1PH	N/A	6,000 Lbs.	12 RPM
PR-366000-NAB	15" to 20"	36"	60"	N/A	Air	6,000 Lbs.	N/A
PR-366000-DC	15" to 20"	36"	60"	3HP-220V/1PH	N/A	6,000 Lbs.	12 RPM
PR-486000-NAB	15" to 20"	48"	60"	N/A	Air	6,000 Lbs.	N/A
PR-486000-DC	15" to 20"	48"	60"	3HP-220V/1PH	N/A	6,000 Lbs.	12 RPM
PR-248000-NAB	15" to 20"	24"	60"	N/A	Air	8,000 Lbs.	N/A
PR-248000-DC	15" to 20"	24"	60"	3HP-220V/1PH	N/A	8,000 Lbs.	12 RPM
PR-368000-NAB	18" to 23"	36"	60"	N/A	Air	8,000 Lbs.	N/A
PR-368000-DC	18" to 23"	36"	60"	3HP-220V/1PH	N/A	8,000 Lbs.	12 RPM
PR-488000-NAB	18" to 23"	48"	60"	N/A	Air	8,000 Lbs.	N/A
PR-488000-DC	18" to 23"	48"	60"	3HP-220V/1PH	N/A	8,000 Lbs.	12 RPM
PR-241000-NAB	15" to 20"	24"	60"	N/A	Air	10,000 Lbs.	N/A
PR-241000-DC	15" to 20"	24"	60"	5HP-220/440/3	N/A	10,000 Lbs.	12 RPM
PR-361000-NAB	18" to 23"	36"	60"	N/A	Air	10,000 Lbs.	N/A
PR-361000-DC	18" to 23"	36"	60"	5HP-220V/440V/3PH	N/A	10,000 Lbs.	12 RPM
PR-481000-NAB	18" to 23"	48"	60"	N/A	Air	10,000 Lbs.	N/A
PR-481000-DC	18" to 23"	48"	60"	5HP-220/440/3	N/A	10,000 Lbs.	12 RPM
PR-3015000-NAB	20" to 24"	30"	72"	N/A	Air	15,000 Lbs.	N/A
PR-3015000-DC	20" to 24"	30"	72"	5HP-220/440/3	N/A	15,000 Lbs.	12 RPM
PR-3615000-NAB	20" to 24"	36"	72"	N/A	Air	15,000 Lbs.	N/A
PR-3615000-DC	20" to 24"	36"	72"	5HP-220/440/3	N/A	15,000 Lbs.	12 RPM
PR-4815000-NAB	20" to 24"	48"	72"	N/A	Air	15,000 Lbs.	N/A
PR-4815000-DC	20" to 24"	48"	72"	5HP-220/440/3	N/A	15,000 Lbs.	12 RPM
PR-6015000-NAB	20" to 24"	60"	72"	N/A	Air	15,000 Lbs.	N/A
PR-6015000-DC	20" to 24"	60"	72"	5HP-220/440/3	N/A	15,000 Lbs.	12 RPM
PR-3620000-NAB	20" to 24"	36"	72"	N/A	Air	20,000 Lbs.	N/A
PR-3620000-DC	20" to 24"	36"	72"	7.5 HP-220/440/3	N/A	20,000 Lbs.	12 RPM
PR-4820000-NAB	20" to 24"	48"	72"	N/A	Air	20,000 Lbs.	N/A
PR-4820000-DC	20" to 24"	48"	72"	7.5 HP-220/440/3	N/A	20,000 Lbs.	12 RPM
PR-6020000-NAB	20" to 24"	60"	72"	N/A	Air	20,000 Lbs.	N/A
PR-6020000-DC	20" to 24"	60"	72"	7.5HP-220/440/3	N/A	20,000 Lbs.	12 RPM

COIL CRADLES

Model Number	Capacity	Width	Coil O.D.	Motor	Rate
P60CC12	6,000 Lbs.	12"	60"	1 1/2 HP-220V/1 PH	0-80FPM
P60CC18	6,000 Lbs.	18"	60"	1 1/2HP-220V/1 PH	0-80FPM
P60CC24	6,000 Lbs.	24"	60"	2HP-220V/1 PH	0-80FPM
P60CC30	6,000 Lbs.	30"	60"	2HP-220V/1 PH	0-80FPM
P60CC36	6,000 Lbs.	36"	60"	2HP-220V/1 PH	0-80FPM
P100CC18	10,000 Lbs.	18"	60"	2HP-220V/1 PH	0-80FPM
P100CC24	10,000 Lbs.	24"	60"	3HP-220V/1 PH	0-80FPM
P100CC30	10,000 Lbs.	30"	60"	3HP-220V/1 PH	0-80FPM
P100CC36	10,000 Lbs.	36"	60"	3HP-220V/1 PH	0-80FPM
P100CC48	10,000 Lbs.	48"	60"	3HP-220V/1 PH	0-80FPM
P100CC60	10,000 Lbs.	60"	60"	3HP-220V/1 PH	0-80FPM
P200CC18	20,000 Lbs.	18"	72"	5HP-220/440/3PH	0-80FPM
P200CC24	20,000 Lbs.	24"	72"	5HP-220/440/3PH	0-80FPM
P200CC30	20,000 Lbs.	30"	72"	5HP-220/440/3PH	0-80FPM
P200CC36	20,000 Lbs.	36"	72"	5HP-220/440/3PH	0-80FPM
P200CC48	20,000 Lbs.	48"	72"	5HP-220/440/3PH	0-80FPM
P200CC60	20,000 Lbs.	60"	72"	5HP-220/440/3PH	0-80FPM

COIL CRADLE/STRAIGHTEN COMBINATIONS

Model Number	Capacity	Width	Coil O.D.	Motor	Rate	Str. Roll	Str. Capacity
P60CCS12	6,000 Lbs.	12"	60"	3HP-220V/1PH	0-80FPM	3"	.130
P60CCS18	6,000 Lbs.	18"	60"	3HP-220V/1PH	0-80FPM	3"	.110
P60CCS24	6,000 Lbs.	24"	60"	3HP-220V/1PH	0-80FPM	3"	.100
P60CCS30	6,000 Lbs.	30"	60"	3HP-220V/1PH	0-80FPM	3"	.090
P60CCS36	6,000 Lbs.	36"	60"	3HP-220V/1PH	0-80FPM	3"	.080
P100CCS12	10,000 Lbs.	12"	60"	5HP-220/440/3	0-80FPM	4"	.300
P100CCS18	10,000 Lbs.	18"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.25
P100CCS24	10,000 Lbs.	24"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.250
P100CCS30	10,000 Lbs.	30"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.220
P100CCS36	10,000 Lbs.	36"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.21
P100CCS48	10,000 Lbs.	48"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.190
P100CCS60	10,000 Lbs.	60"	60"	7 1/2HP-220/440/3	0-80FPM	4"	.15
P200CCS18	20,000 Lbs.	18"	60"	10HP-220/440/3	0-80FPM	4"	.250
P200CCS24	20,000 Lbs.	24"	60"	10HP-220/440/3	0-80FPM	4"	.250
P200CCS30	20,000 Lbs.	30"	60"	10HP-220/440/3	0-80FPM	4"	.220
P200CCS36	20,000 Lbs.	36"	60"	10HP-220/440/3	0-80FPM	4"	.210
P200CCS48	20,000 Lbs.	48"	60"	10HP-220/440/3	0-80FPM	4"	.190
P200CCS60	20,000 Lbs.	60"	60"	10HP-220/440/3	0-80FPM	4"	.150

PRODUCT USE: All products described in this catalog are sold in accordance with accepted industry practices pertaining to the use of this type of equipment. IT IS THE RESPONSIBILITY OF THE USER OF THIS EQUIPMENT TO COMPLY WITH ALL CURRENT AND FUTURE SAFETY REGULATIONS SPECIFIED BY THE OCCUPATIONAL SAFETY AND HEALTH ACT AND/OR THE USER'S STATE OR LOCAL SAFETY LAWS. THE USE OF SAFETY GUARDS IS REQUIRED TO PREVENT OPERATOR INJURY.

WARRANTY

The products described in this catalog are warranted by Press Room Equipment Company (PRE) to be free from defects in workmanship and materials for a period of 1 year from date of shipment by the company. (See terms and conditions sheet for complete details.)

Note: 5 HP and larger motors must be specified as 230V/3Ph or 440V/3Ph at the time of order. Many options are available for PRE reels such as: hydraulic expansion, hold down arms, special speeds, special expansion ranges, coil cars, non-contact loop controls, etc. Please call for capacities over 20,000 Lbs. Refer to the websites for additional information.